



Technical specifications

Scope Single Anchor Point


The Single Anchor Point (SAP) is suitable for the use of 1 person and meets the standard EN 795/A. It is possible to string a temporary line between two Scope Anchor Points. The SAP consists of a baseplate and a rotating 360° anchor eye. The Scope baseplate is installed through the roofing material on the roof and made watertight with a rosette. The baseplate is then confirmed with 4 fasteners to the construction and thereafter the anchor eye will be screwed on. The Scope is of excellent quality for years of use.

Use

Suitable for the use of max. 1 person.


Materials

Anchor disk:	Stainless steel 316 – 5 mm
Sealing disk:	Aluminium 2 mm
Baseplate:	Stainless steel 304 – 2 mm (Pickling)
Surface treatment:	Powder coating (electropolished anchor eye)
Safety bolt:	Stainless steel 316
Sealing disk:	Nylon

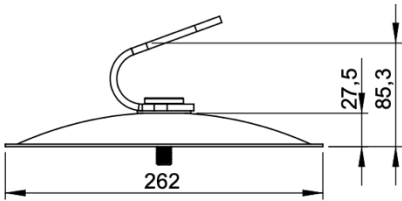

Technical details

Breaking strength:	25 kN
Weight:	0.8 kg
Dimensions:	Height 108 mm Diameter 262 mm
Anchorage:	M10 M12
Colour:	Red (custom colors available on request)
Packaging:	Per piece
Tooling:	Safety bolt wrench
Ref.:	VB97DI038

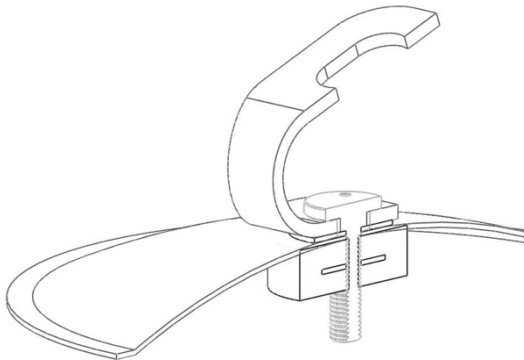

Technical specifications

Scope Single Anchor Point